


# NEW PRODUCT NEWS



High-efficiency threading


## Thread Whirling

High-efficiency threading I For CNC automatic lathe

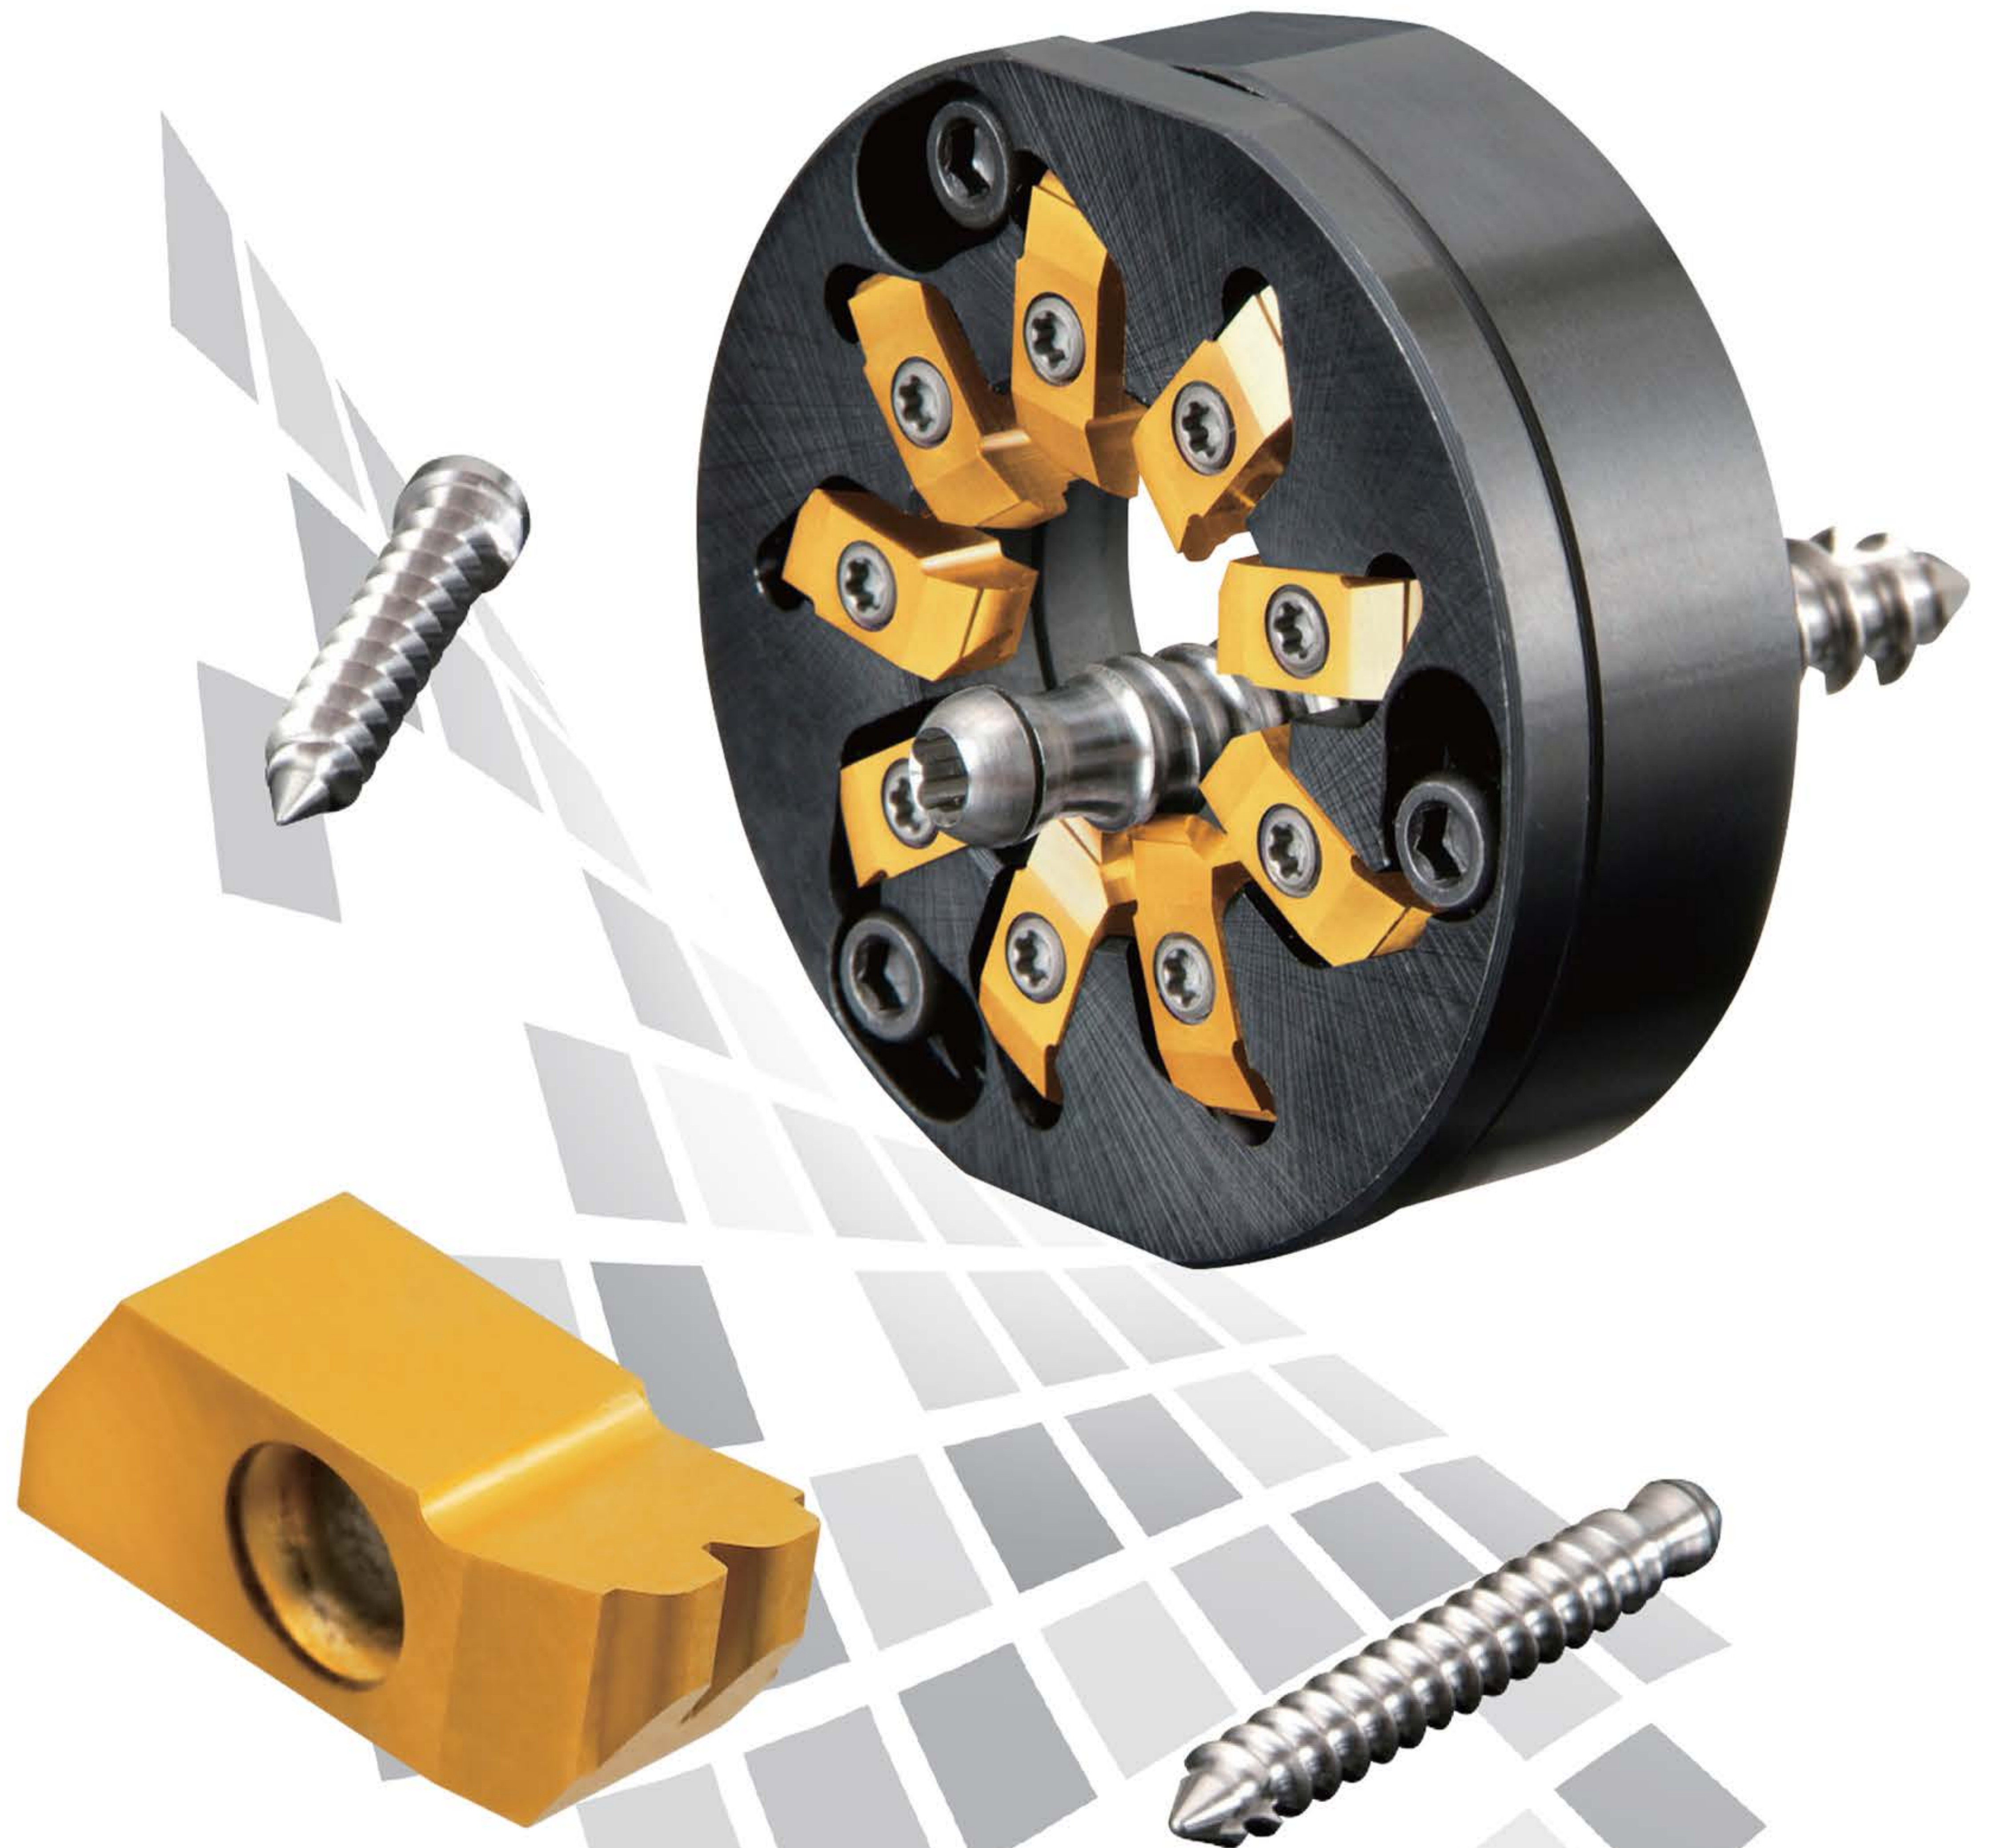

High productivity for precision screw manufacturing, such as implant screws and bones screws. Extensive experience in machining worm screws, which are known to be difficult to cut.

## High-efficiency threading

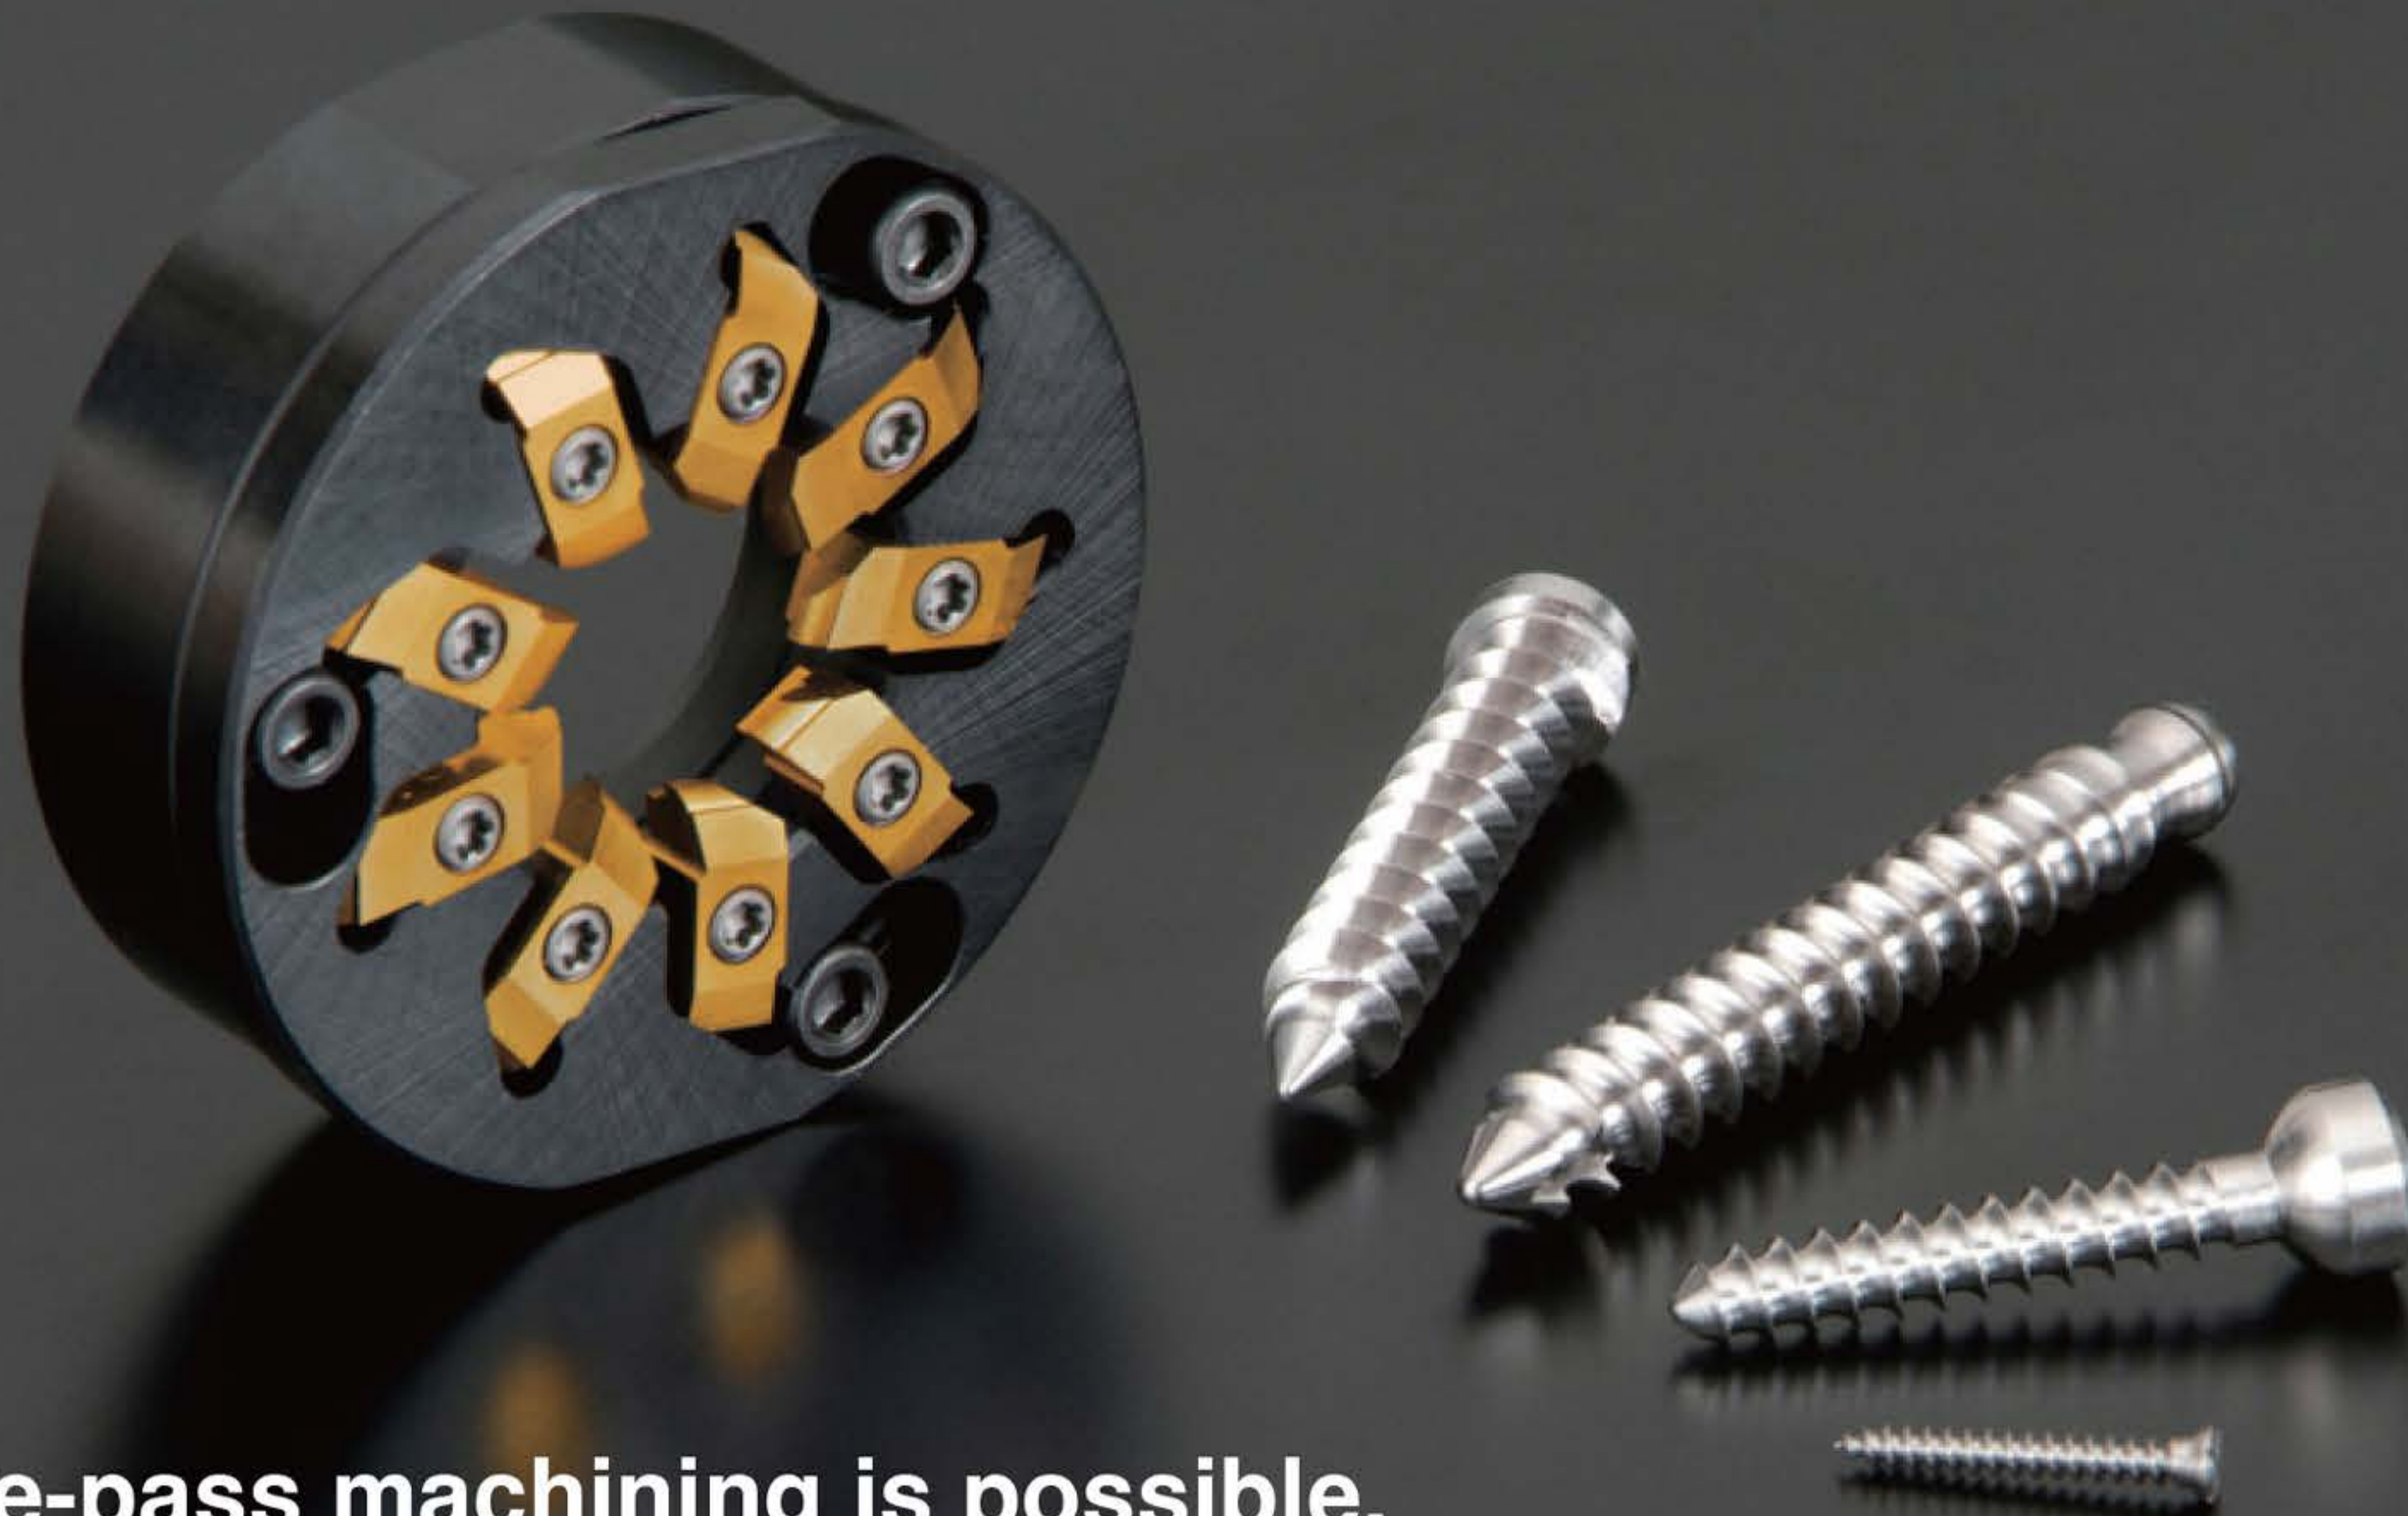

Single-pass machining is possible, and multi-lead threads are also supported. Significantly reduces the machining time of threading.

### High-efficiency threading I for CNC automatic lathes

## Thread whirling

#### | Performance

In automatic lathes, threading is performed by repeating multiple cutting passes. Therefore, when machining long screws, it is necessary to ensure that the workpiece does not fall off from the guide bush. However, thread whirling allows for single-pass machining, eliminating the need for subsequent joining process.

In addition, single-pass machining is possible even for multi-lead threads such as double and triple lead screws. This eliminates the need for multiple cutting passes and subsequent joining processes, thus achieving high-efficiency threading.

	Double-lead threads	Triple-lead threads
Component name	Bone Screws	Worm Screws
Work material	Ti-6Al-4V ELI	brass
Workpiece		
Insert shape		
Major Dia.	φ4.0	φ7.0
Minor Dia.	φ2.4	φ4.7
Lead	3.42mm	4.9mm

When machining multi-lead threads by in a single pass, numerous process requirements must be met. Please contact us to discuss mechanical, Spindle, Insert, tooling specification,.

#### | Machining overview

In thread whirling, the whirling head is tilted to a specific helix angle, and the cutter is rotated at high speed while the bar stock (c axis) is rotated at a low speed.

It is possible to machine the outer dimension by adding a wiper to the insert.

Thread whirling



## High-efficiency threading

### NTK's unique easy-to-detach system

Thread whirling toolholder can be attached and detached without removing mounting screws



① Loosen the Mounting Screws


② Rotate toolholder 10 degrees

③ Detach the toolholder without removing the Mounting Screws

### Applicable Thread Geometry (Approximated)

● Lead: 1-3 leads

● Bar stock diameter ~ around  $\phi$ 10mm (for cutters with 12mm ID)

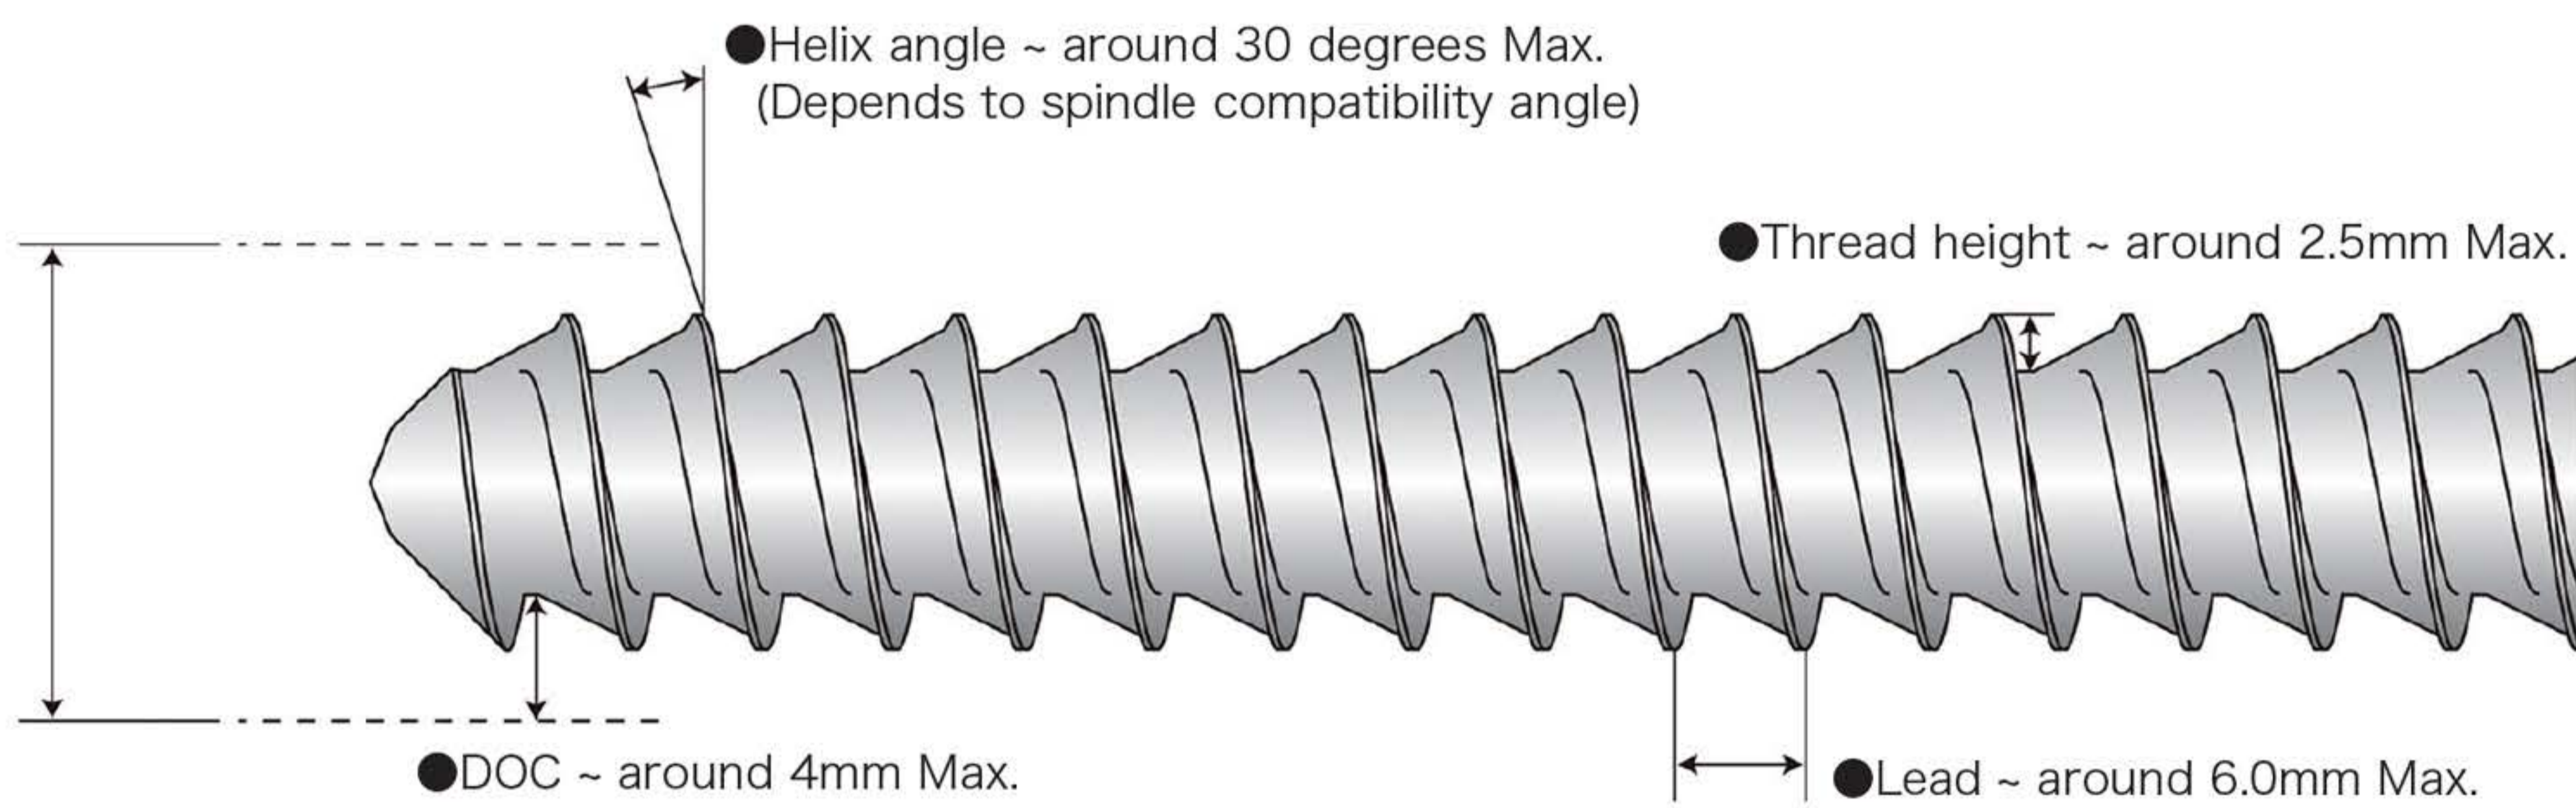

The geometries shown above are approximated and could vary by actual applications

### Recommended Cutting Conditions

Conditions / No. of teeth		9	6	4	
Main spindle	min-1	10-40	10-25	7-15	Faster RPM reduces machining time
Whirling cutter	min-1	1500-4000			
Feed Rate		pitch			
Material diameter	mm	$-\phi$ 10	$-\phi$ 10	$-\phi$ 8	
Work Material		Ti-6Al-4V EL / SUS316 / 17-4PH / Titanium / Brass			

Formula for calculating thread whirling process time

$$T \text{ (Second)} = \frac{60 \times \text{Thread length}}{\text{Main spindle rpm} \times \text{Feed rate (Thread Lead)}}$$

Ex.) Double lead / 50mm length / 2mm lead (2 × 1mm pitch) / 30rpm

$$T \text{ (second)} = \frac{60 \times 50\text{mm}}{30\text{rpm} \times 2\text{mm lead}} = 50 \text{ second}$$

## High-efficiency threading

### Practical examples

Single-lead Bone Screw					
Work Material	SUS316	Major Dia.	φ3.5	NTK Thread Whirling 9-Blade Specification	2,600 pcs
Material Diameter	φ8.0	Minor Dia.	φ2.5		
Spindle Speed	23rpm	Number of Threads	1	Competitor Thread Whirling 6 Blade Specification	1,000 pcs
Cutter Speed	2,000rpm	Lead Angle	7.5°		
Pitch/Feed	1.2mm/rev	Thread Direction	Right-hand thread		
Double-lead Bone Screw					
Work Material	Titanium alloys	Major Dia.	φ4.0	NTK Thread Whirling 9-Blade Specification	26 sec
Material Diameter	φ9.5	Minor Dia.	φ0.5		
Spindle Speed	15rpm	Number of Threads	2	Competitor Chasing Processing	170 sec
Cutter Speed	3,500rpm	Lead Angle	28.5°		
Pitch/Feed	5.5mm/rev	Thread Direction	Right-hand thread		
Triple-lead Worm Gear					
Work Material	Brass	Major Dia.	φ7.0	NTK Thread Whirling 9-Blade Specification	Once out of shape
Material Diameter	φ8.0	Minor Dia.	φ4.7		
Spindle Speed	20rpm	Number of Threads	3	Competitor Thread Whirling	Shape forming by 3 times
Cutter Speed	3,500rpm	Lead Angle	14.6°		
Pitch/Feed	4.8mm/rev	Thread Direction	Left-hand thread		

Tool life  
2.6 times  
longer!

6x productivity!

Shape  
forming by  
1 time!

# CONTACT US



## MEGA TECH METALWORK CO.,LTD ( Headquarter )



**Tel : 02-943-1591**



**Fax : 02-943-1592**



**Line ID : @mgt\_metalwork**



**Email : sales.m@mgtg.co.th**



**Web : <https://www.mgtg.co.th/>**



**17/4 Soi Ramintra 89  
Ramintra Khannayao  
Bangkok 10230**



For more  
Information

**SCAN NOW**

